
CAT-RAD® 5e Communications Cable

CAT-RAD®

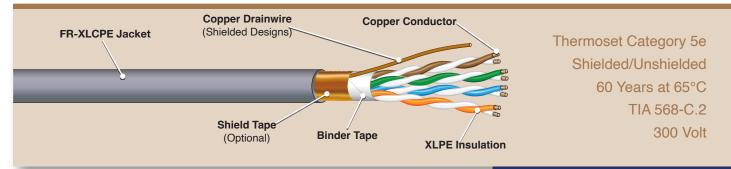

Features

- Shielded or Unshielded
- Thermoset insulation and jacket for enhanced thermal stability
- · Extremely flame retardant
- Radiation resistant
- · Specially formulated insulation for superior long term water resistance
- Full traceability
- Excellent mechanical properties
- · Does not contain PVC or Fluoropolymers
- Mates with RJ-45 jack
- Can be used for data, voice, power over ethernet (to 57 volts), security, audio-visual, access control, and similar applications.

Performance Standards

- ETL qualified to TIA 568-C.2
- 10 CFR 50 Appendix B quality assurance program
- · Insulation and jacket in accordance with ICEA standards
- · IEEE 383-1974 70,000 BTU/hr vertical tray flame test as modified by NRC Reg. Guide RG 1.131
- · IEEE 1202 70,000 BTU/hr vertical tray flame test

Construction

Conductor: Annealed solid 24 AWG bare copper to ASTM B3

Insulation: Proprietary nuclear qualified cross linked polyethylene (XLPE)

Circuit ID: Blue/White-Blue, Orange/White-Orange, Green/White-Green, Brown/White-Brown

Assembly: 4 pairs cabled

Marmon Industrial

Binder Tape: Flame retardant binder

Shield/Drainwire: Copper/Polyester foil with 24 AWG drainwire (shielded designs only) **Jacket:** Proprietary thermoset material

Туре	Product Code	OD"	Weight (Lbs/M')
Unshielded	FD08024-500	0.23	28
Shielded	FD08024-550	0.29	37



Made in the USA

Marmon Industrial Energy & Infrastructure © 2023 • 20 Bradley Park Road • East Granby, CT 06026 USA • 800-327-7625 Tel: 860-653-8300 • Fax: 860-653-8301 • www.marmoniei.com

Scope

CAT-RAD[®] 5e cable is a thermoset nuclear grade category 5e communications cable designed specifically for applications in nuclear plants and like environments. It offers proven support for gigabit ethernet applications and broadband video.

CAT-RAD[®] 5e cable is intended for use in harsh and demanding areas offering radiation resistance and 60 years of life at 65°C.