


Firewall® III Instrumentation Cable

Multi-Shielded Pairs Without Overall Shield XLPE/HD-CSPE (Hypalon®)

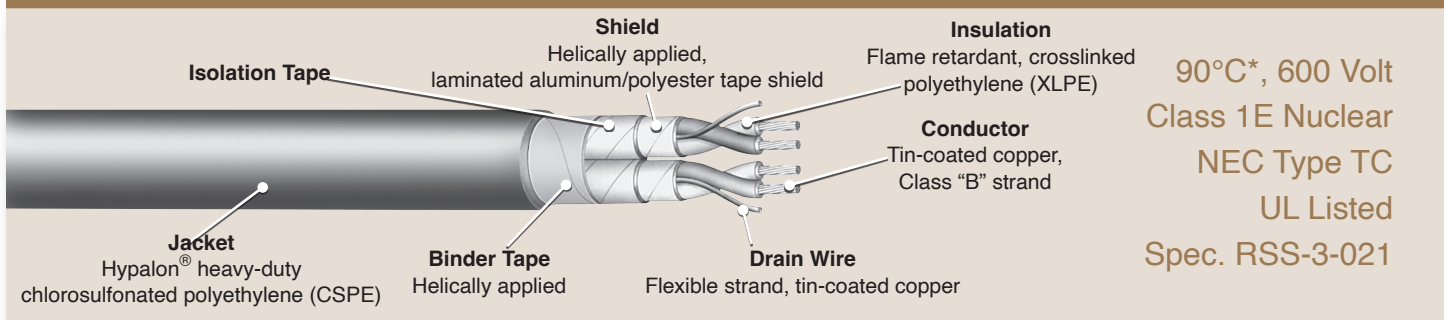

90°C*, 600 Volt
Class 1E Nuclear
NEC Type TC
UL Listed
Spec. RSS-3-021

Features

- Thermoset insulation and jacket for enhanced thermal stability
- Specially formulated insulation for superior long term water resistance
- Extremely flame retardant
- Nuclear qualified with a minimum 40-year thermal life expectancy at 90°C
- Radiation resistant (up to 200 megarads)
- Full traceability
- Excellent mechanical properties
- Tin-coated copper conductors for improved terminations and corrosion resistance
- All singles pass a wet dielectric (tank) test prior to cabling to verify electrical integrity
- All jackets have printed sequential footage markers for improved inventory control
- Easy strippability for installation ease
- Shield to shield isolation system provided and verified by electrical testing

Scope

Firewall® III Instrumentation Cable is a totally thermoset construction specifically designed for applications in power generation plants, substations and other similar locations. It is intended for use in harsh and demanding environments, including Class 1E Nuclear applications. It may be installed in trays, ducts, conduits or in direct burial applications to perform a variety of signaling and related functions. *Designed for use on circuits where shielding over individual pairs is required but additional overall shielding is not critical.*

Performance Standards

- Insulation in accordance with ICEA S-66-524 and UL approved for 90°C applications in both wet & dry locations
- Jackets in accordance with ICEA S-19-81 for Hypalon® heavy-duty chlorosulfonated polyethylene (CSPE)
- Class 1E qualified in accordance with IEEE 383-1974 and IEEE 323-1974 (RSCC Reports QR-5804 or QR-5805)
- Cable passes IEEE 383-1974 70,000 BTU/hr vertical tray flame test as modified by NRC Reg. Guide 1.131
- Cable passes ICEA T-29-520 210,000 BTU/hr vertical tray flame test
- Single conductors pass the vertical flame tests specified in IEEE 383-1974 para. 2.5.6 (ICEA S-19-81 Section 6.19.6) and UL VW-1
- Quality Assurance program in accordance with 10 CFR 50 Appendix B
- UL Listed Type TC for cable tray installations (UL 1277)
- In accordance with the National Electrical Code (approved for Class 1, Division 2 hazardous locations)

Construction

Conductor: Annealed, tin-coated copper, Class "B" strand (ASTM B8 & B33)

Insulation: Proprietary heat, moisture and radiation resistant flame retardant crosslinked polyethylene

Pair Assembly: Two insulated conductors twisted with a flexible strand tin-coated copper drain wire, a helically applied aluminum/polyester laminated tape shield, and an isolation tape

Cabling: Required number of pairs cabled together

Circuit Identification: One black and one white insulated single conductor in each pair with printed pair numbers on both singles for pair identification (alternate methods also available)

Fillers: As applicable

Binder Tape: Helically applied

Jacket: Hypalon® black, heavy-duty chlorosulfonated polyethylene (HD-CSPE)

* Rated 90°C for normal operation in wet and dry locations, 130°C for emergency overload conditions, and 250°C for short circuit conditions.

Firewall® III

Instrumentation Cable

Multi-Shielded Pairs Without Overall Shield XLPE/HD-CSPE (Hypalon®)



90°C*, 600 Volt
Class 1E Nuclear
NEC Type TC
UL Listed
Spec. RSS-3-021

16 AWG, 7 Strand

Product Code	Number of Pairs	Insulation Thickness		Insulated Conductor Diameter (inch)	Drain Wire Size/ Stranding	Jacket Thickness (Mils)	Nominal Overall Diameter		Approximate Net Weight (Lbs/M')
		(inch)	(mm)				(inch)	(mm)	
I46-0042	2	.025	.64	.11	18 AWG (16/s)	45	.51	12.95	160
I46-3485	3	.025	.64	.11	18 AWG (16/s)	60	.57	14.48	215
I46-0082	4	.025	.64	.11	18 AWG (16/s)	60	.62	15.75	260
I46-3486	5	.025	.64	.11	18 AWG (16/s)	60	.68	17.27	310
I46-3232	7	.025	.64	.11	18 AWG (16/s)	60	.74	18.80	345
I46-3487	9	.025	.64	.11	18 AWG (16/s)	80	.91	23.11	480
I46-3029	12	.025	.64	.11	18 AWG (16/s)	80	1.02	25.91	610
I46-3489	15	.025	.64	.11	18 AWG (16/s)	80	1.13	28.70	715
I46-3490	19	.025	.64	.11	18 AWG (16/s)	80	1.19	30.23	840
I46-5984	37	.025	.64	.11	18 AWG (16/s)	80	1.60	40.64	1515

18 AWG, 7 Strand

Product Code	Number of Pairs	Insulation Thickness		Insulated Conductor Diameter (inch)	Drain Wire Size/ Stranding	Jacket Thickness (Mils)	Nominal Overall Diameter		Approximate Net Weight (Lbs/M')
		(inch)	(mm)				(inch)	(mm)	
I57-0023	2	.025	.64	.10	20 AWG (10/s)	45	.46	11.68	125
I57-0033	3	.025	.64	.10	20 AWG (10/s)	45	.49	12.45	155
I57-0043	4	.025	.64	.10	20 AWG (10/s)	60	.57	14.48	205
I57-0053	5	.025	.64	.10	20 AWG (10/s)	60	.62	15.75	245
I57-0073	7	.025	.64	.10	20 AWG (10/s)	60	.68	17.27	265
I57-0093	9	.025	.64	.10	20 AWG (10/s)	60	.79	20.07	335
I57-0123	12	.025	.64	.10	20 AWG (10/s)	80	.93	23.62	470
I57-0153	15	.025	.64	.10	20 AWG (10/s)	80	1.03	26.16	545
I57-0193	19	.025	.64	.10	20 AWG (10/s)	80	1.08	27.43	630
I57-0373	37	.025	.64	.10	20 AWG (10/s)	80	1.45	36.83	1125

* Rated 90°C for normal operation in wet and dry locations, 130°C for emergency overload conditions, and 250°C for short circuit conditions.